


Stasys 218

Key features:

- High power reflex loaded double 18" low frequency enclosure
- 2400 Watts AES power handling
- Optimally damped, minimal mass cabinet
- Dual 18" low frequency transducers with 4" coils
- 18 mm birch plywood construction

Applications:

- Large scale touring

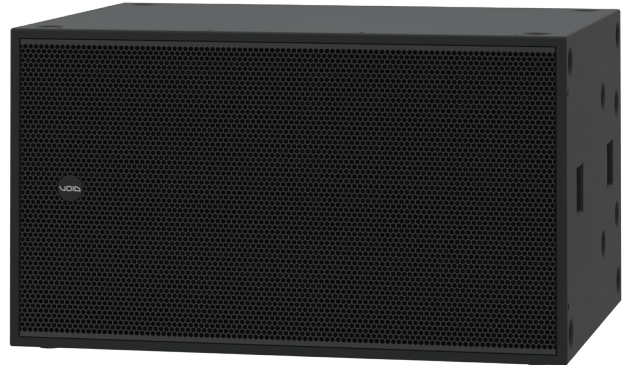

The Stasys 218 is a double 18", reflexloaded, low frequency enclosure built around traditional principles but designed with Stasys philosophy and attention to detail. Resonance mapping has influenced the optimal brace positioning and minimal destructive nodal conditions, creating a superior structure with minimum mass, the least possible cabinet colouration, and vastly increased output. Marrying a technologically advanced enclosure with a powerful transducer, results in a phenomenal package with state-of-the-art performance.

Specifications

Frequency response	32 Hz - 200 Hz \pm 3 dB
Efficiency ¹	101 dB 1W/1m
Nominal impedance	4 Ω
Power handling ²	2400 W AES
Maximum output ³	134 dB cont, 140 dB peak
Driver configuration	2 x 18" LF
Dispersion	Array dependent
Connectors	2 x 4-pole speakON™ NL4
Weight	86 kg (189.6 lbs)
Enclosure	18 mm birch plywood
Finish	Textured 'TourCoat' polyurea
Grille	Perforated steel with foam filter

¹ Measured in half space ² AES2 - 1984 compliant ³ Calculated

Stasys 218

Architectural specifications

The loudspeaker system shall be of the sub bass type consisting of two high power 18" (457.2 mm) direct radiating, reflex loaded, low frequency (LF) transducers in a rectangular enclosure.

The low frequency transducer shall be constructed on a cast aluminium frame, with a treated paper cone, long excursion 101.6 mm (4") voice coil, wound with copper wires on a high quality voice coil former and a neodymium magnet for high power handling and long-term reliability.

Performance specifications for a typical production unit shall be as follows: the usable bandwidth shall be 32 Hz to 200 Hz (± 3 dB) and have a maximum on axis SPL of 134 dB continuous (140 dB peak) measured at 1 m using IEC265-5 pink noise. Power handling shall be 2400 W AES at a rated impedance of 4 Ω with pressure sensitivity of 101 dB measured at 1W/1m. The

system shall be powered by its own dedicated power amplification module with DSP management. The wiring connection shall be via two Neutrik speakON™ NL4 (one for input and one for loop-out to another speaker), to allow for pre-wiring of the connector before installation.

The enclosure shall be constructed from a 18 mm multi-laminate birch plywood finished in a textured polyurea and shall contain fixture points for a pressed weather-resistant, powder coated steel grille with foam filter to protect the low frequency transducer. The cabinet shall have four handles (two per side) for efficient manual handling. External dimensions of (H) 586 mm x (W) 1020 mm x (D) 775 mm (23.1" x 40.2" x 30.5"). Weight shall be 86 kg (189.6 lbs).

The loudspeaker system shall be a Void Acoustics Stasys 218.

